

# 25 Foot Square Straight Light Pole, 5 Inch Wide, 7 Gauge



## PRODUCT DESCRIPTION

**Pole Top Options:** A removable pole cap is provided. If tenon option is selected, a steel tenon will be provided.

**Pole Shaft:** Pole shaft is constructed from ATSM-A500 Grade B cold rolled steel and yield strength of 50,000 PSI. All poles are Polyester powder coated finish Bronze. Standard colors are Bronze, White, Grey and Black. Specialty colors available upon request.


**Handhole:** 3' x 5" size handhole is located at 18 inches from the base made from 18 gauge mild steel and Powder Coated . Handhole cover with screw is provided. A ground lug with set screw is located near the handhole opening for proper grounding of the pole.

**Bolt Circle:** 11 '' (Bolt Circle Range 10'' – 12'')

**Base Cover:** Two piece 18 gauge steel, Polyester Powder Coated

**Warranty:** 5 Years.

**Foundation design:** Foundation should be designed by an engineer familiar with local soil and wind conditions as well local code where the pole(s) will be installed.

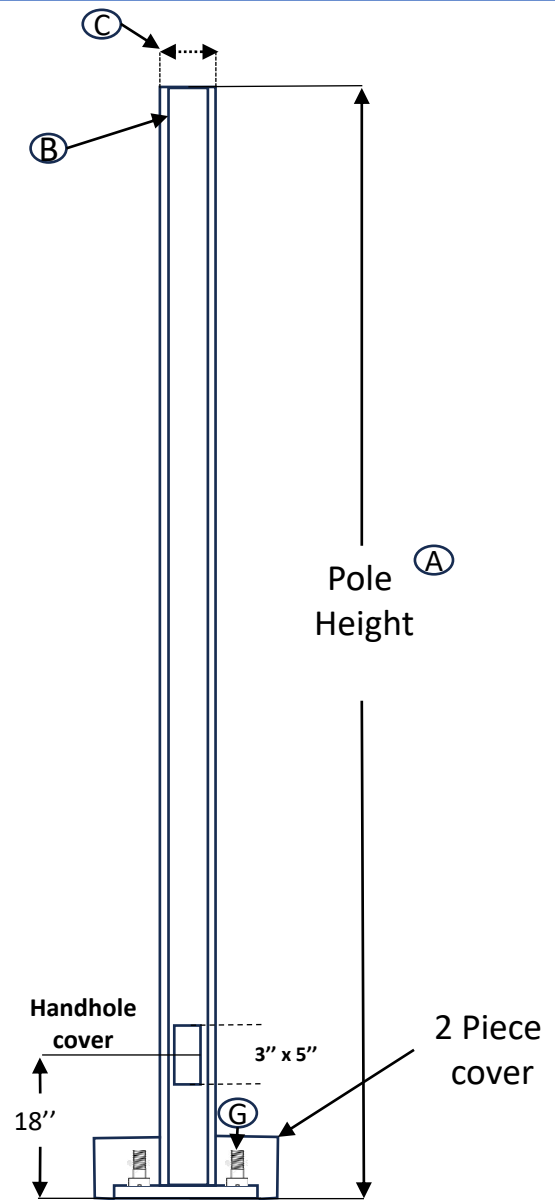

SPECIFICACION TABLE		
Mounting Height (ft.)	A	25
Gauge	B	7
Diameter (in.)	C	5
Base Width (in.)	D	11
Bolt Circle (in.)	E	11
Base Thickness (in.)	F	1
Anchor Bolt Size (in.)	G	1 x 36 x 4
Bolt Circle Range (in.)	-	10'' – 12''
Pole Weight (lbs.)	-	330

MAXIMUM EPA WITH 1.3 GUST FACTOR (SQUARE FEET)					
mph	mph	mph	Mph	mph	Mph
90	100	110	120	130	140
17.7	13.2	11.9	9.0	6.7	4.5

